

Product Information

Active Receiving Antenna STA 5 A/D/0.01-100

This antenna is an active monopole receiving antenna providing omnidirectional characteristics in the long-, medium-, short-wave and VHF LOW bands.

It covers the frequency range from 0.01 – 100 MHz.

Due to its small dimension and the very low radiation coupling, this active antenna is particularly qualified for mobile as well as stationary application under unfavorable localities.

An amplifier circuit directly connected to the base point of the antenna rod matches the high impedance of the rod to the low input impedance of the receiver or the connected coaxial cable.

The aas.tech active receiving antennas are fitted with amplifiers providing a high RF dynamic range to avoid degradation of the reception system characteristics.

A multistage protection circuit at the input of the active element ensures that the antenna electronics will not be damaged even in case of lightning strikes in immediate proximity.

Screw-on rods allows easy matching of the rod length to a wide variety of operating conditions.

Regarding the robust construction and the use of weatherproof materials our active antennas can be used under extreme environmental conditions.

The nominal operating voltage for the antenna is 39 Vdc. The AAN power supply series or an aas.tech Antenna Distribution System is used to feed the operating voltage to the active element via the coaxial cable.




Technical Data

Parameter	Data
Application	active monopole antenna
Characteristic	vertically polarized omnidirectional antenna
Color	light grey (similar RAL 7035)
Bending moment at mounting flange	1 daNm (wind speed 150 km/h)
Shock	50 g/10 ms
Vibration	4 – 12,5 Hz, amplitude = 1,6 mm 12,5 - 90 Hz, acceleration 10 m/s ²
Ambient temperature	-40°C...+70°C
Storage temperature	-55°C...+80°C
Relative humidity	100 %
EMP test	STANAG 4145
Lightning protection	500 kV/m/μs
RF connector	N socket
Supply voltage	39 Vdc through coaxial cable
MTBF	80.000 h (Tu=40°C)
MTTR	0,5 h (replacing of subunits)
Frequency range	0,01 – 100 MHz
Output impedance	50 Ω VSWR ≤ 1,3
Effective height at 50 Ω	4,5 cm (tolerance ± 1 dB)
Intermodulation 2nd order ⁽¹⁾ E1=E2=100 mV/m	82 dB
Intermodulation 3rd order ⁽¹⁾ E1=E2=100 mV/m	130 dB


Equivalent noise field strength ⁽¹⁾
 (limit of sensitivity B=1 Hz)

Sensitivity ⁽¹⁾
 (B=3 kHz, S/N=10 dB)

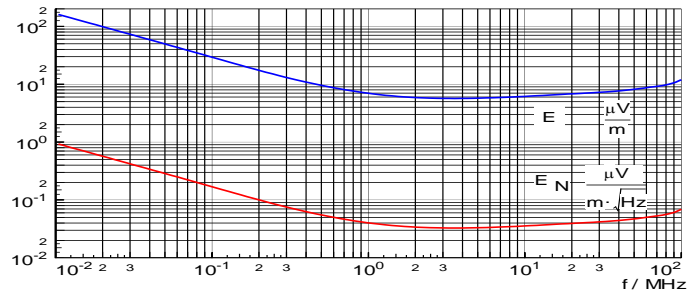

Cross modulation
 (causing 10 % modulation) ⁽¹⁾

Max. tolerable field strength
 (1dB reduction of gain) ⁽¹⁾

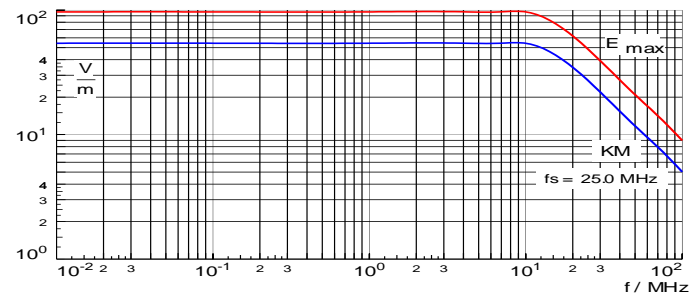





⁽¹⁾ The technical data refer to a vertically mounted antenna on conductive ground plane.
 For calculation of other rod lengths resp. mounting heights refer to doc. AN1.

Design and specification are subject to change without prior notice, errors excepted.
 Data given without tolerance are typical values.

Scope of Supply

Pos.	Description
1	Active Receiving Rod Antenna STA .. A/D/0.01-100
2	Accessory Set ZS 15
3	USB stick with product documentation in pdf format

Dimensions and Weight

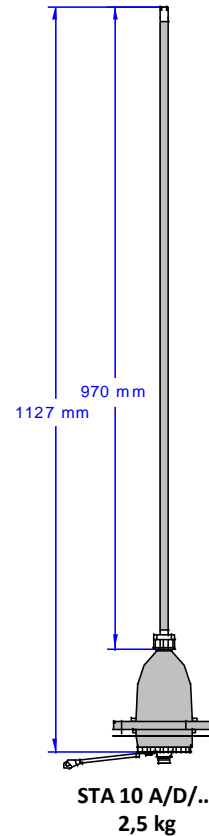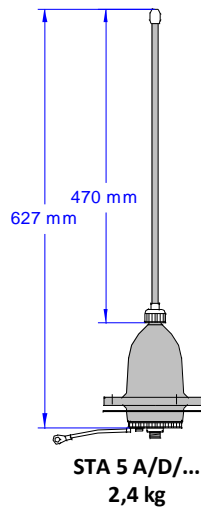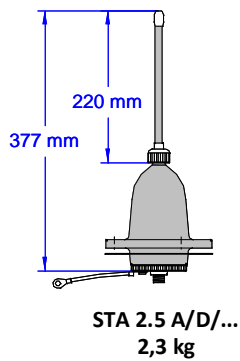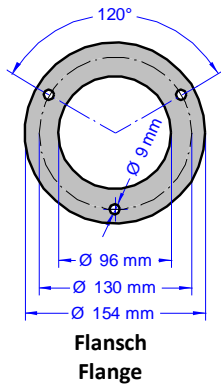

Accessories

Type Designation	Part No.	Description
ZS 15	0028.3715.00	Accessory set consisting of <ul style="list-style-type: none"> - 1 ea. N male plug Part No. ST.0015 - 1 ea. Rubber sleeve for N plug black Part No. A.0047 - 1 ea. Flat Gasket 7 Part No. 0002.2101.04 NSN 5330-12-320-9989

Variants and Order Information

Type Designation	Part No. NSN	Description
STA 5 A/D/0.01-100	0005.8912.00	50 cm rod, color RAL 7035
STA 2.5 A/D/0.01-100	0005.8908.00	25 cm rod, color RAL 7035
STA 10 A/D/0.01-100	0005.8917.00	100 cm rod, color RAL 7035
STA 10 A/D/L/0.01-100/RAL7001	0005.9003.00	100 cm rod, color RAL 7001

Other variants are available on request.

Options

Option	Part No. NSN	Description
RAL Color Code	depends on RAL color code	Painting in RAL color according to customer specification
AE ME	0005.5805.00	Reconfigure antenna frequency range to 0.01 – 30 MHz by replacement of active element to AE ME Configuration to STA .. A/D/0.01-30 Doc. PIG 010103
AE MB1	0005.5826.00	Reconfigure antenna frequency range to 1.6 – 30 MHz by replacement of active element to AE MB1 Configuration to STA .. A/D/1.6-30 Doc. PIG 010108
AE ME4	0005.5827.00	Reconfigure antenna frequency range to 0.01 – 1.6 MHz by replacement of active element to AE ME4 Configuration to STA .. A/D/0.01-1.6 Doc. PIG 010106
AE MS4	0005.5822.00 5985-12-334-6141	Reconfigure antenna frequency range to 0.01 – 0.6 MHz by replacement of active element to AE MS4 Configuration to STA .. A/D/0.01-0.6 Doc. PIG 010105

Other or customer specific options are available on request.

Spare Parts

Applicable for the following types of active antennas:

- **STA 2.5 A/D/0.01-100**
- **STA 5 A/D/0.01-100**
- **STA 10 A/D/0.01-100**

No.	Designation Type	Part-Number NSN	Max. Qty. (a)	MTBF/hrs MTTR/hrs	Dimensions/mm Weight/kg (b)	Qty (c) Qty (d)	Remark
1	Insulator ISO A1	0005.4201.00	1	130.000	160x150	-	
		5970-12-320-6145		-	1,00	-	
2	Flat Gasket 7	D.0052	1	-	160x3	1	
		5330-12-320-9989		-	0,20	1	
3	Antenna Rod STA 2.5	0005.4206.00	1	130.000	32x220	1	applicable for STA 2.5 A/D/..
		5985-12-320-5342		-	0,15	1	
3a	Antenna Rod STA 5	0005.4204.00	1	130.000	32x470	1	applicable for STA 5 A/D/..
		5985-12-320-5341		-	0,20	1	
3b	Antenna Rod STA 10	0005.4202.00	1	130.000	32x970	1	applicable for STA 10 A/D/..
		5985-12-314-0516		-	0,30	1	
4	Active Element AE MD	0005.5804.00	1	80.000	80x130	1	
				1,0	0,75	1	
5	O-Ring 69x3 mm	A.0254	1	-	69x3	1	
		5331-12-331-7313		-	-	1	
6	Test Adapter TA 1/10	0014.0200.00		-	170x70		applicable for test purposes
				-	0,80		
7	Manual STA .. A/D/0.01-100	058912		-	DIN A4		
				-	-		

- (a) Maximum quantity per equipment
 (b) Dimensions and weight are without packing
 (c) Recommended quantity per equipment for 90 days on board
 (d) Recommended quantity per equipment for 3 years depot

Note:

The spare part table is applicable for versions in standard color (similar RAL7035).
 Spare parts (insulators, rods) in other colors are available.

Associated Products

For integration into the application environment associated products are available.

Type Designation	Part No. NSN	Description
AAN 110	2061.0110.00	19-inch 1 HU Remote Power Supply Unit Frequency range 0.01 – 100 MHz
		The AAN 110 provides 1 remote power feeding port and 1 receiver port, typically used with 1 active monopole antenna STA or 1 active dipole antenna HD 1 A.
		AAN 110 replaces AAN 10/B (0008.7424.00) Concerning 19-inch rack installation the AAN 110 requires 1 HU rack space instead of 3 HU required by AAN 10/B.
		Doc. PIG 010620
AAN 120	2061.0120.00	19-inch 1 HU Remote Power Supply Unit Frequency range 0.01 – 100 MHz
		The AAN 120 provides 2 remote power feeding ports and 2 receiver ports, typically used with 2 active monopole antennas STA or 2 active dipole antennas HD 1 A or 1 active dipole antenna HD 2 A.
		Doc. PIG 010620
		Doc. PIG 010620
AAN 130	2061.0130.00	19-inch 1 HU Remote Power Supply Unit Frequency range 0.01 – 100 MHz
		The AAN 130 provides 3 remote power feeding ports and 3 receiver ports, typically used with 3 active monopole antennas STA or 2 active dipole antennas HD 1 A or 1 active dipole antenna HD 2 A or 1 active combination antenna HD 2 A + STA ...
		AAN 130 replaces AAN 30/B (0008.7427.00) Concerning 19-inch rack installation the AAN 130 requires 1 HU rack space instead of 3 HU required by AAN 30/B.
		Doc. PIG 010620
AAN 140	2061.0140.00	19-inch 1 HU Remote Power Supply Unit Frequency range 0.01 – 100 MHz
		The AAN 140 provides 4 remote power feeding ports and 4 receiver ports, typically used with 4 active monopole antennas STA or 2 active dipole antennas HD 1 A or 1 active dipole antenna HD 2 A or 1 active combination antenna HD 2 A + STA ...
		Doc. PIG 010620
		Doc. PIG 010620

Associated Products (continued)

Type Designation	Part No. NSN	Description
EAH 1	0007.2800.00	Adapter for mounting a monopole antenna on a pipe with external diameter of 2" (60,3 mm) Doc. PIG 010501
	0007.3411.00	2" supporting pipe 1 m high, aluminum, RAL 7035 (EAH 1 required) with EAH 1 the distance from ground to antenna base is 1 m Doc. PIG 010502
TR 10/E1	0007.3411.00	
RF Coaxial Cable	2078.xxxx.00 ---	Assembled ready-made coaxial cable according to customer specification. Type of connectors and type of cable to be specified by customer.
TA 1/10	0014.0200.00 6625-12-373-2794	Test adapter for active elements of AE M series Frequency range 0.01 – 100 MHz integrated load represents 100 cm rod
TA 1/20	0014.0400.00	Test adapter for active elements of AE M series Frequency range 0.01 – 100 MHz integrated load represents 200 cm rod
TA 1/5	0014.0500.00	Test adapter for active elements of AE M series Frequency range 0.01 – 100 MHz integrated load represents 50 cm rod
TA 1/2.5	2060.0200.02	Test adapter for active elements of AE M series Frequency range 0.01 – 100 MHz integrated load represents 25 cm rod